


Product Data Sheet

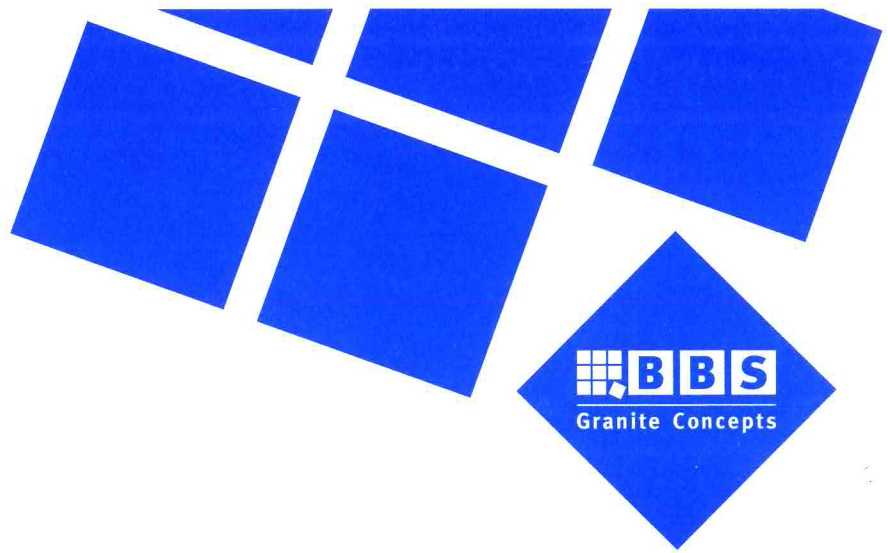

G682 Buff Grey Granite

Description

Appearance	Medium to coarse grained crystalline rock
Finishes	Flamed, Fine Picked, Cropped, Honed or Polished
Governing Standards	Where applicable BS EN 1343 : 2001 will be applied.
Quarry of Origin	Fujian, P.R.C.

Physical Properties

Work Dimensions	To customers specification
Tolerances on Dimensions	Class 2
Compressive Strength	178 Mpa
Flexural Strength	15 MPa
Material Density	2650 kg/m ³ (typically)
Slip Resistance	75 Wet – TLR Slider Test 82 Dry – TLR Slider Test
Abrasion Resistance	18 mm
Water Absorption	0.50 %

Supply

Crate Size	Maximum 1.8 tonnes. Approx size 1.0 x 1.0 x 0.80 high
Packaging	Wooden crates, suitable for stacking and transportation by fork lift.

Cleaning and Maintenance

Use of mechanical cleaning, especially wire brushing, should be avoided as this will reduce, over time, skid resistance. Washing with clean water should be adequate but not pressure jetting as this could eventually remove the jointing material